


CYLINDRICAL BUSHINGS D...x.	
Type of protection	Ⓢ I M2 Ex db I Mb Ⓢ II 2G Ex db IIC Gb
Operating temperature *	-60 °C to + 70 °C

* It is the maximum range of operating temperatures of all explosion-proof bushing types. The real range is given by the used type of wires or cables.

Type **V - WIRE** (with stranded wires)

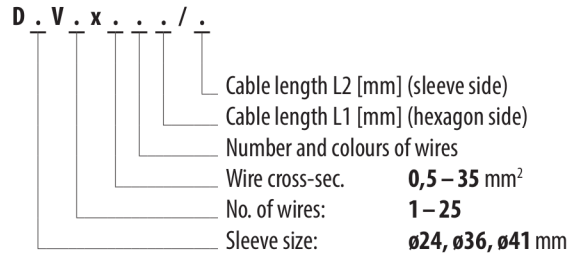

Order code example: D36V7×2,5 4bk+3bu 300/500

A particular version of the bushing is given by the technical specification according to which we can design an optimum solution. For more information contact the technical service department – e-mail: obchod@generi.cz.